


Full-Size SERIES 380 Modular General Purpose Regulators

R380 Models Port Sizes: 3/8, 1/2, 3/4

Available Color Caps



Model Shown: R380-6G

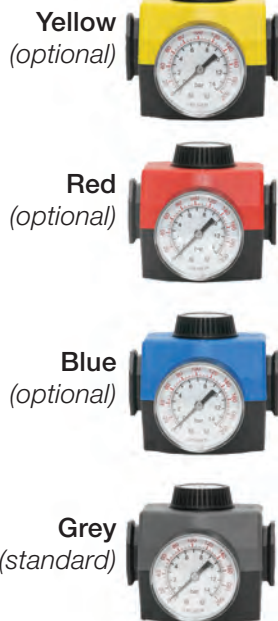

- ◆ Modular or inline mounting. Modular mounting allows regulators to be positioned at increments of 45° for ease in adjustment.
- ◆ Self-relieving diaphragm design; large diaphragm sensing ratio; non-relieving optional.
- ◆ Pressure gauge.
- ◆ Pressure adjustment locking key; tamper-resistant pressure setting.
- ◆ NPTF port threads; optional SAE or BSPP threads.

SPECIFICATIONS

Ambient/Media Temperature:

40° to 175°F (4° to 79°C).

Body:

Zinc.

Dome:

Nylon; aluminum with optional 0-175 psig spring.

Cap Color:

Accent grey. Yellow, red, and blue optional.

Fluid Media: Compressed air.

Inlet Pressure:

300 psig (21 bar) maximum.

Knob:

Acetal

Outlet Pressure:

Adjustable up to 125 psig (8.6 bar); optional adjusting springs.

Pressure Adjustment Locking Key:

Removable.

Pressure Gauge:

0 to 200 psig (14 bar); 1/4 NPT gauge ports front and rear.

Panel Mounting:

2-1/16 inch (52 mm) hole required.

Seals:

Nitrile.

Self-relieving:

Non-relieving optional.


Valve:

Brass.

Valve Cap:

Nylon.

FLOW CHARTS

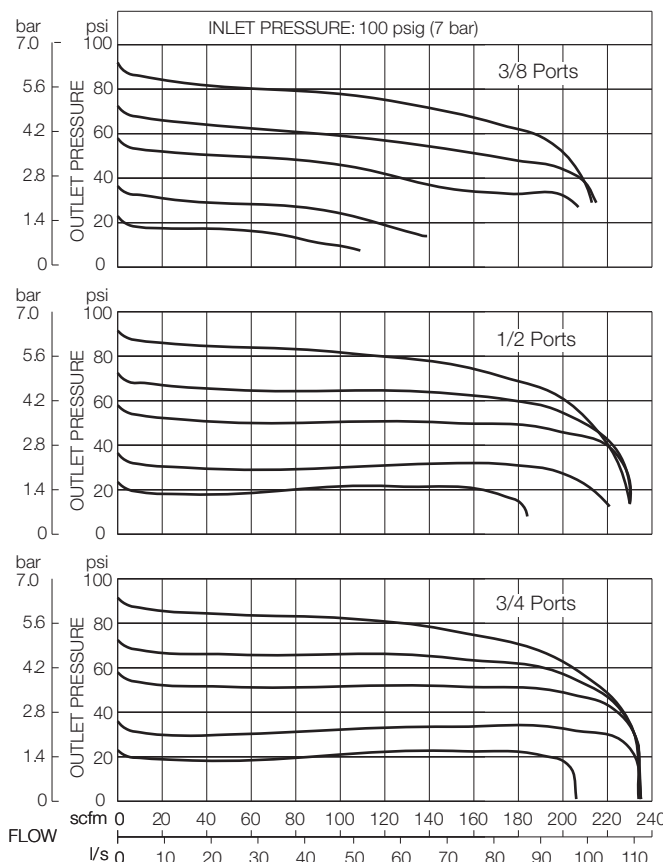


DIMENSIONS inches (mm)

				Weight †
A	B *	C **	Depth †	lb (kg)
3.5 (87)	5.6 (142)	1.6 (40)	2.9 (73)	2.56 (1.16)

* Dome removal clearance: add 0.625 (16).

** Cap removal clearance: add 0.50 (13).

† Less gauge.

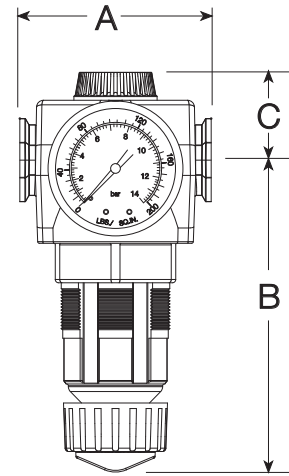

ORDERING INFORMATION

Change the letters in the sample model number below to specify the regulator you want.

R380 - 3 Y G W

PORT SIZE

- 3/8 NPTF..... 3
- 1/2 NPTF..... 4
- 3/4 NPTF..... 6
- 3/4-16 UNF SAE S8
- 7/8-14 UNF SAE S10

OPTIONS (More than one option can be chosen. Add in alphabetical order)

- NoneLeave Blank
- Non-relievingA
- Cap color: Grey is standard.
 - MP yellowC1
 - Red.....C2
 - Mid blue.....C3
- Internal bypass - reverse flowE
- Springs: (0-125 psig standard)
 - For optimum performance operating pressure should fall approximately in the middle of the spring range.
 - 0-175 psig (0-12 bar) H**
 - 0-50 psig (0-3.4 bar) L
 - 0-20 psig (0-1.4 bar)..... L20
- Metal Dome MD
- Limit maximum psig setting M*
- Tee handle..... T

* Insert maximum limited pressure.
 ** H option spring includes metal dome.

PORT TYPE

- NPTF threads Leave Blank
- BSPP threads W

OPTIONS (More than one option can be chosen. Add in alphabetical order)

- None Leave Blank
- 0-200 psig Gauge G
- Mounting nut P

MOUNTING BRACKETS

See page 320.