

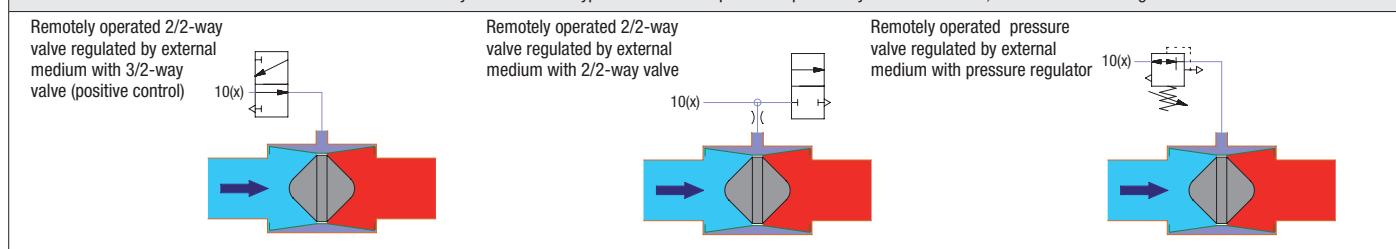




2/2-Way Solenoid Valve Type PGV Series 100 Pressure Operated by External Medium - Double-Sided Isolating

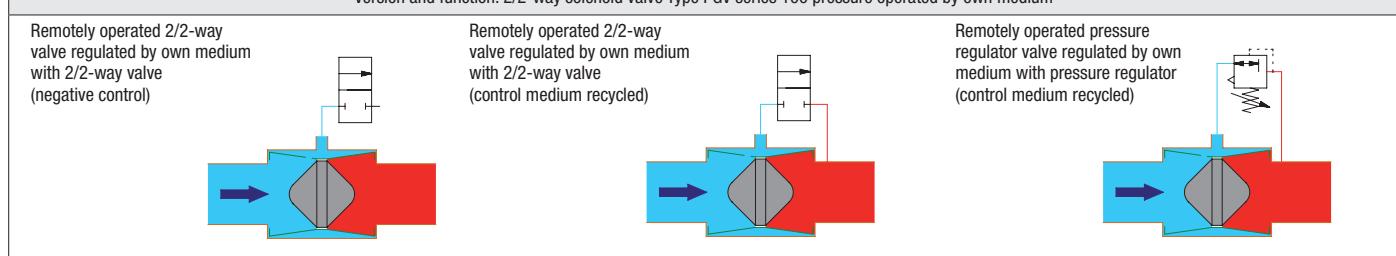
Price group	53	Function "B" normally open (without control pressure)	low noise and impact-free closing, for neutral, gaseous and fluids	Amb. temp. T _{min} -20 °C, T _{max} +60 °C Med.-Temp. T _{min} -10 °C, T _{max} +90 °C		Brass			
Version	Control pressure [bar]	DN	Kv-value water [m ³ /h]	G	PN	Sealing material	Type	Order number	Price
2/2-way valve pressure operated, isolating double-sided by external medium Permitted operating pressure 0.2 to 16 bar	 	≥ operating pressure max. 16	15	5.6	G 1/2	16	NBR	PGV-131-B76-1/2BP	614201 o. r.
			15	5.6	G 1/2	16	EPDM	PGV-131-B76-1/2PP	614203 o. r.
			15	5.6	G 1/2	16	FKM	PGV-131-B76-1/2FP	614205 o. r.
			20	7.6	G 3/4	16	NBR	PGV-131-B76-3/4BP	614211 o. r.
			20	7.6	G 3/4	16	EPDM	PGV-131-B76-3/4PP	614213 o. r.
			25	16.8	G 1	16	NBR	PGV-131-B76-1BP	614221 o. r.
			25	16.8	G 1	16	EPDM	PGV-131-B76-1PP	614223 o. r.
			25	16.8	G 1	16	FKM	PGV-131-B76-1FP	614225 o. r.
			32	21	G 1 1/4	16	NBR	PGV-131-B76-5/4BP	614231 o. r.
			32	21	G 1 1/4	16	EPDM	PGV-131-B76-5/4PP	614233 o. r.
			32	21	G 1 1/4	16	FKM	PGV-131-B76-5/4FP	614235 o. r.
			40	29.5	G 1 1/2	16	NBR	PGV-131-B76-6/4BP	614241 o. r.
			40	29.5	G 1 1/2	16	EPDM	PGV-131-B76-6/4PP	614243 o. r.
			40	29.5	G 1 1/2	16	FKM	PGV-131-B76-6/4FP	614245 o. r.
			50	35	G 2	16	NBR	PGV-131-B76-2BP	614251 o. r.
			50	35	G 2	16	EPDM	PGV-131-B76-2PP	614253 o. r.
			50	35	G 2	16	FKM	PGV-131-B76-2FP	614255 o. r.

Version and function: 2/2-way solenoid valve Type PGV series 100 pressure operated by external medium, double-sided blocking

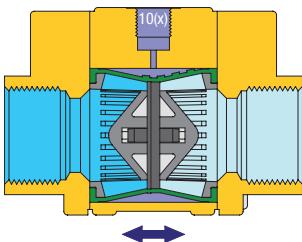




2/2-Way Solenoid Valve - Type PGV Series 100 Pressure Operated by own Medium

Price group	53	Function "B" normally open (without control pressure)	low noise and impact-free closing, for neutral, gaseous and fluids		Brass				
Version	Control pressure [bar]	DN	Kv-value water [m ³ /h]	G	PN	Sealing material	Type	Order number	Price
2/2-way valve pressure operated, by own medium Permitted operating pressure 0.2 to 16 bar	 	≥ operating pressure max. 16	15	5.6	G 1/2	16	NBR	PGV-131-B76-1/2BN	614301 o. r.
			15	5.6	G 1/2	16	EPDM	PGV-131-B76-1/2PN	614303 o. r.
			15	5.6	G 1/2	16	FKM	PGV-131-B76-1/2FN	614305 o. r.
			20	7.6	G 3/4	16	NBR	PGV-131-B76-3/4BN	614311 o. r.
			20	7.6	G 3/4	16	EPDM	PGV-131-B76-3/4PN	614313 o. r.
			20	7.6	G 3/4	16	FKM	PGV-131-B76-3/4FN	614315 o. r.
			25	16.8	G 1	16	NBR	PGV-131-B76-1BN	614321 o. r.
			25	16.8	G 1	16	EPDM	PGV-131-B76-1PN	614323 o. r.
			25	16.8	G 1	16	FKM	PGV-131-B76-1FN	614325 o. r.
			32	21	G 1 1/4	16	NBR	PGV-131-B76-5/4BN	614331 o. r.
			32	21	G 1 1/4	16	EPDM	PGV-131-B76-5/4PN	614333 o. r.
			32	21	G 1 1/4	16	FKM	PGV-131-B76-5/4FN	614335 o. r.
			40	29.5	G 1 1/2	16	NBR	PGV-131-B76-6/4BN	614341 o. r.
			40	29.5	G 1 1/2	16	EPDM	PGV-131-B76-6/4PN	614343 o. r.
			40	29.5	G 1 1/2	16	FKM	PGV-131-B76-6/4FN	614345 o. r.
			50	35	G 2	16	NBR	PGV-131-B76-2BN	614351 o. r.
			50	35	G 2	16	EPDM	PGV-131-B76-2PN	614353 o. r.
			50	35	G 2	16	FKM	PGV-131-B76-2FN	614354 o. r.

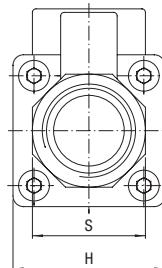
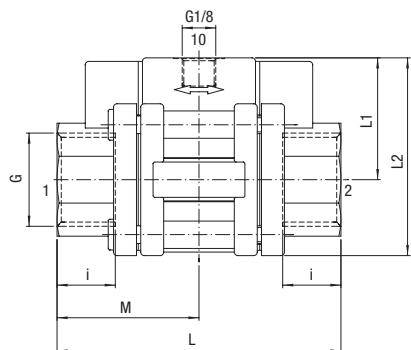
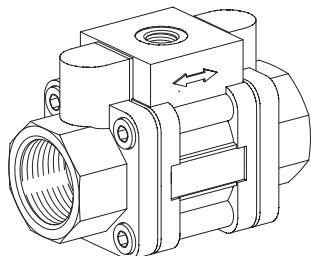
Version and function: 2/2-way solenoid valve Type PGV series 100 pressure operated by own medium

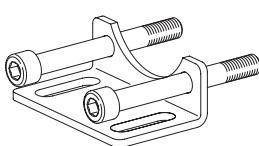


Function

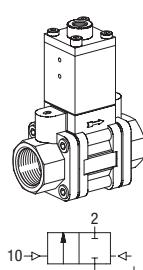
Price group	53	Function "B" normally open (without control pressure)	low noise and impact-free closing, for neutral, gaseous and fluids	Brass
Operating position		Variations	Options	
		 <p>2/2-way intermediate flange valve (both versions) Flange-side 4 through bores: Type PGV-131-BHH-...</p>	 <p>normal pressure membrane, requires no differential pressure to open, however control pressure to close, it 1 bar above operating pressure Type PGV-131-B76-...</p>	
<p>Type PGV in external medium version shown, control pressure present.</p>		 <p>2/2-way flange mount valve (only external medium vers.) Flange-side or thread-side pressure inlet Type PGV-131-BH7-...</p>	 <p>Membrane made of other material: CR (chloroprene) optimal for compressed air HNBR (NBR with higher nitrile content) specially for certain synthetic oils</p>	

Illustration






Dimensions									Mounting Accessories				
DN	G	L	I	M	L1	L2	H	S	Illustration	Suitable for valves	Type	Order number	Price
15	G 1/2	68.4	13.5	34.2	34.5	56	43	27		G 1/2 + G 3/4 DN 15 and DN 20	ZGV-10normal D2normal 52	616252	o. r.
20	G 3/4	80.4	15.5	40.2	34.5	56	43	32		G 1 + G 1 1/4 DN 25 and DN 32	ZGV-10normal D32-62	616262	o. r.
25	G 1	94	17	47	42.5	72	59	41					
32	G 1 1/4	112	19	56	42	71.5	59	50					
40	G 1 1/2	132	21	66	56	99.5	87	55					
50	G 2	160	24.5	80	56	99.5	87	70					


2/2-Way Valve - Pressure Operated - Type PGV Series 100

Price group	53	Function "A" normally closed	low noise functioning, for gaseous media, especially compressed air							Brass
Version	Controlpressure [bar]	DN	QNn-value air [l/min]	G	PN	Sealing material	Type (Partial solenoid valve without solenoid coil)	Order number	Price	
<p>2/2-way valve pressure-operated by maintained compressed air</p> <p>Permitted operating pressure 0.2 to 16 bar</p> 	4 - 7	15	6100	G 1/2	16	NBR	PGV-151-A96-1/2BP	614371	o. r.	
	4 - 7	20	8300	G 3/4	16	NBR	PGV-151-A96-3/4BP	614372	o. r.	
	4 - 7	25	18400	G 1	16	NBR	PGV-151-A96-1BP	614373	o. r.	
	4 - 7	32	23400	G 11/4	16	NBR	PGV-151-A96-5/4BP	614374	o. r.	
	4 - 7	40	32400	G 11/2	16	NBR	PGV-151-A96-6/4BP	614375	o. r.	
	4 - 7	50	38400	G 2	16	NBR	PGV-151-A96-2BP	614376	o. r.	

Variations



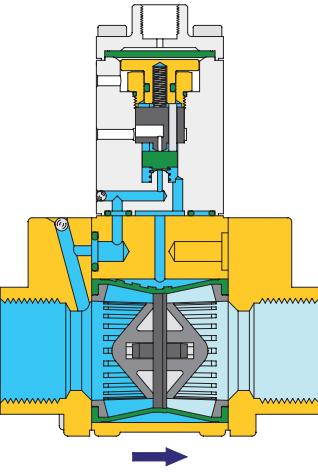
	2/2-way intermediate flange valve Flange-side 4 through bores: Type PGV-151-ALH-...
	2/2-way flange mount valve Flange-side pressure inlet Type PGV-151-AL7-...
	2/2-way flange mount valve Thread-sided pressure inlet Type PGV-151-A9H-...

Options

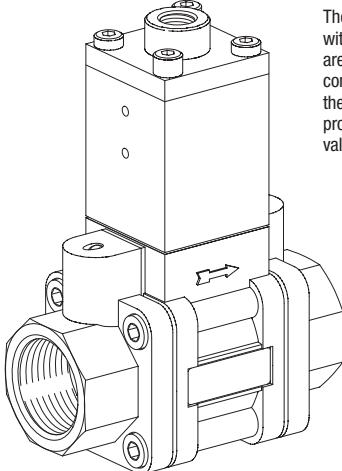
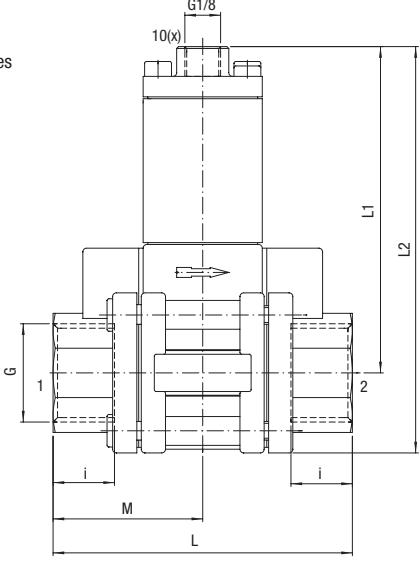
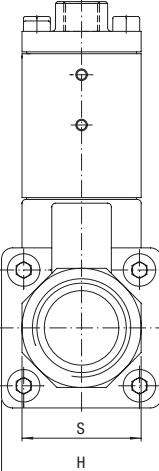
	Membrane made of other material: CR (chloroprene) optimal for compressed air HNBR (NBR with higher nitrile content) specially for certain synthetic oils		increases resistance to corrosion, and replaces stainless steel valves cost-effectively for many medium Type PGV-151Q-...
	Non-return valve integrated outlet-side of the closure-unit Type PGV-151-A96-./T Pressure difference: DN 15 to DN 32, 10 bar DN 40 to DN 50, 8 bar		

Function - Speciality

Price group	53	Function "A" normally closed	low noise functioning, for gaseous media, especially compressed air	Brass
-------------	-----------	------------------------------	---	-------

Operating position	Description	Function
 	<p>In normal position - pre-control valve not pressurised - its seat is closed. Pressure builds up in the control chamber, which due to the larger effective membrane surface holds the membrane in "closed" position.</p> <p>In operational position - pre-control valve pressurised - its operational seat is closed. The control chamber is discharged by the open seat and the membrane held in "open" position by the medium. A minimum pressure difference is required for this operation.</p>	

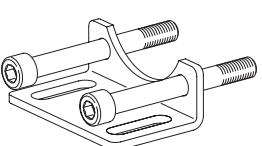
Illustration

	<p>These servo-controlled valves with pneumatic operation are used in the control of compressed air, e.g. for the purposes of explosion protection, where solenoid valves are not desirable.</p>		
--	--	---	--

Dimensions

DN	G	L	i	M	L1	L2	H	S
15	G 1/2	68.4	13.5	34.2	86.1	107.6	43	27
20	G 3/4	80.5	15.5	40	86	107.5	43	32
25	G 1	94	17	47	94.1	123.6	59	41
32	G 1 1/4	112	19	56	94	123.5	59	50
40	G 1 1/2	132	21	66	107.6	151.1	87	55
50	G 2	160	24.5	80	107.6	151.1	87	70

Mounting Accessories

Illustration	Suitable for valves	Type	Order number	Price
	G 1/2 + G 3/4 DN 15 and DN 20	ZGV-10normal D2normal 52	616252	o. r.
	G 1 + G 1 1/4 DN 25 and DN 32	ZGV-10normal D32-62	616262	o. r.